

PC PREMIUM

QUICK START-UP GUIDE


PLEASE NOTE:

- Buttons **must** be illuminated in order to operate.
- Cell will be 'OFF' for two minutes after start up to allow for the system to be fully flowing.
- Your PC Premium may have some functions turned off – these functions can be turned on via MENU ACCESS – see operating manual.

IMPORTANT SAFETY INSTRUCTIONS

- Install and operate your PC Premium in accordance with this guide and the operating manual.
- Use a good quality test kit (within its use-by date) to check pool water chemistry is within the ranges advised by your pool builder.
- Test water daily for the first 2 weeks of operation and on a regular basis thereafter. Always take samples from near the skimmer box to get the most accurate readings.

Illustration of PC Premium Instrument Panel

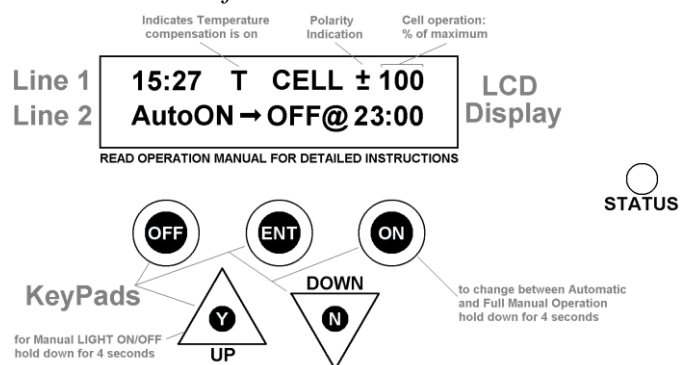

Line 1 – shows the current time and the Cell operation. For the example above line 1 would read “3:27pm, Temp compensator on, Cell Output 100%”. Note that with the Temp compensator ON the Cell Output can be less than 100%.

Line 2 – shows timer information. The line 2 example above is read as “unit has turned ON automatically and will turn OFF automatically at 23:00 (11pm)”

START UP:

TO SET TIME

Press “ENT” → “TIMER” is displayed
Press “ENT” → “SET TIME” is displayed
Press “ENT” → “HOURS” is displayed
Scroll through using up/down buttons on keypad to set the hours
Press “ENT” → “MINUTES” is displayed
Scroll through using up/down buttons on keypad to set the minutes

FILTER CYCLES

Times are preset to the following:
7.00 – 11.00am and 6.00 – 10.00 pm

TO CHANGE TIMES:

Press “ENT” → “TIMER” is displayed
Press “ENT” → “SET TIME” is displayed
Scroll up to ‘ADJUST CYCLES’
Press “ENT” → “ADJUST CYCLE 1” - ON/OFF
Press “ENT” → “ADJUST CYCLE 2” - ON/OFF
Press “ENT” → Adjust times using up/down buttons on keypad (24 hour clock)

TO ADJUST CHLORINE PRODUCTION:

To INCREASE chlorine output by 10% –
Press the “UP” button on the keypad once
To DECREASE chlorine output by 10% –
Press the “DOWN” button on the keypad once

TO TURN THE PUMP ON:

Press “ON” once.
The pump will turn off at the next cycle change

TO TURN THE PUMP OFF:

Press “OFF” once.
The pump will turn on at the next cycle change

LIGHT OUTLET (150W Max per GPO): MANUAL OPERATION

Hold “UP” button for 4 seconds for ON/OFF
TO CHANGE AUTO TIMES OF POOL LIGHTS:
Press “ENT” → “TIMER” is displayed
Press “ENT” → “SET TIME” is displayed
Scroll down to “LIGHT OUTLET”
Press “Y” / “N”
Scroll up/down to adjust the time.

TO TURN ON “AUTO” FILTER CYCLES:

If the PC Premium is not in “AUTO” mode:
Press “ON” and hold the button down for 4 seconds.
The same action will turn off AUTO mode

OPTIONAL pH MODEL

PC Premium will adjust pH by adding acid manually and automatically

MANUAL pH/ACID DOSE:

If it is necessary to adjust the pH:
Press “ENT” → “+ACID MENU” is displayed
Press “ENT” → “DOSE ON? Y/N” is displayed
Press “Y” → “ADJ MANUAL DOSE” is displayed
Press “Y” → Adjust the amount to add
Consult the your installer or Operator’s Manual available to download from www.reltech.com.au

AUTO pH/ACID DOSE:

Press “ENT” → “+ACID MENU” is displayed
Press “ENT” → “DOSE ON? Y/N” is displayed
Press “Y” → “ADJ AUTO DOSE” is displayed
Press “Y” → Adjust the amount to add
Consult the your installer or Operator’s Manual available to download from www.reltech.com.au